


STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

VAR 3° E

LOWI Radar 119.270Mhz
Tower 119.700Mhz

ZELL AM SEE
ÖSTERREICH AUSTRIA

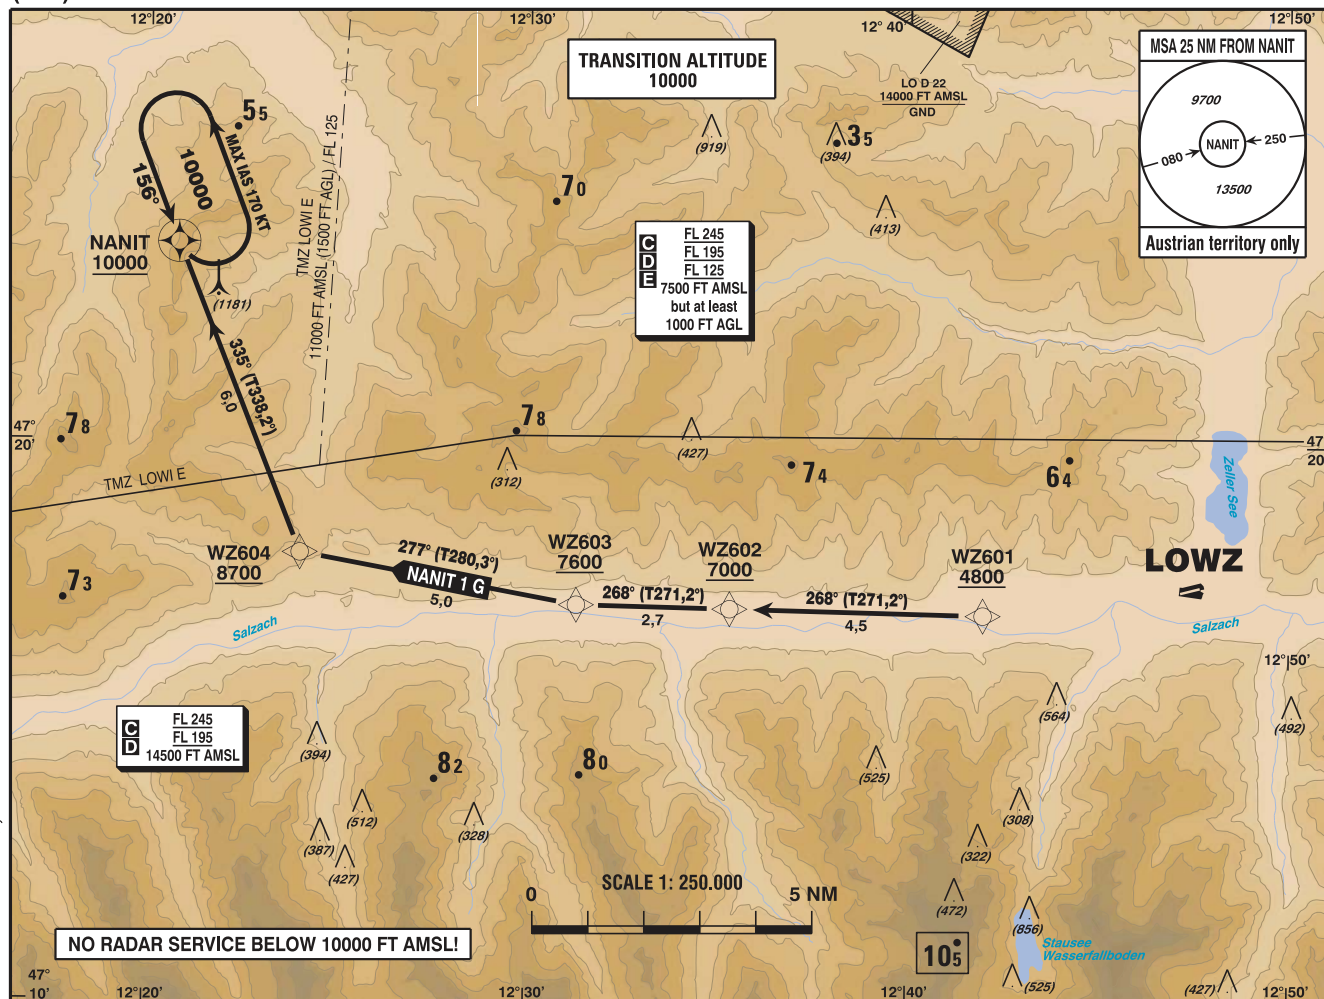

- GNSS required
- RNAV 1 or P-RNAV approval required

Departing from LOWZ only allowed as VFR flight,
IFR starts, when passing WZ601, established on track to
WZ602 and passing 4800 FT AMSL


IFR procedure is within airspace class G until 2 NM north
of WZ604

Operating as IFR flight along SID subject to ATC clearance

Obtain further ATC-Route clearance on FRQ 119.275 MHZ

Flights shall contact Approach LOWI FRQ 119.275 MHZ
when passing 7000 FT AMSL

CONTOUR LEGEND



BEARINGS AND TRACKS
ARE MAGNETIC

TRACKS IN BRACKETS
ARE TRUE

ALTITUDES, ELEVATIONS
AND HEIGHTS ARE IN FEET

DISTANCES ARE IN NM

Designator	Route		After Take-Off		Remarks					
			Climb to ..initially	Expect FREQ						
NANIT 1 G Nanit one Golf departure	WZ601 - WZ602 - WZ603 - WZ604 - NANIT		By ATC	INNSBRUCK RADAR 119.275 MHZ	Climb gradient at least 8.0% (490 FT/NM) until WZ602, thereafter 3.6% (220 FT/NM).					
Contact INNSBRUCK RADAR when advised by Tower										
RNAV SID Coding Table of NANIT 1 G										
Path Terminator	Waypoint			Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Flyover	Coordinates				Level	Speed		
IF	WZ601		N471700.56 E0124158.57				A4800+		RNAV 1	
TF	WZ602	no	N471706.12 E0123519.70	268° (271.2°)	4.5		A7000+		RNAV 1	
TF	WZ603	no	N471709.30 E0123118.09	268° (271.2°)	2.7		A7600+		RNAV 1	
TF	WZ604	no	N471803.14 E0122402.12	277° (280.3°)	5.0	right	A8700+	K165-	RNAV 1	
TF	NANIT	yes	N472334.87 E0122047.17	335° (338.2°)	6.0	right	A10000+	K165-	RNAV 1	

RNAV Holding								
Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	MAX IAS	Minimum Holding Altitude FT MSL / FL	Time	DIST NM	Remarks
NANIT	159.0°	156°	left	K170-	10000 FT MSL	1 MIN		