

For Flight Simulation and non commercial use only !
Courtesy of Austro Control GmbH

Courtesy of Austro Control GmbH



vacc
AUSTRIA

ÖSTERREICH AUSTRIA
COPTER RNP 293
CAT H

Radar	134.675Mhz
Tower	118.600Mhz


EGNOS
CH 62373
E29A

HGT RELATED TO HRP ELEV

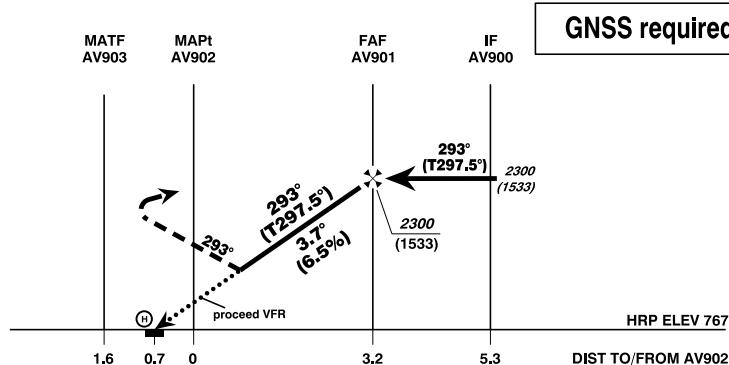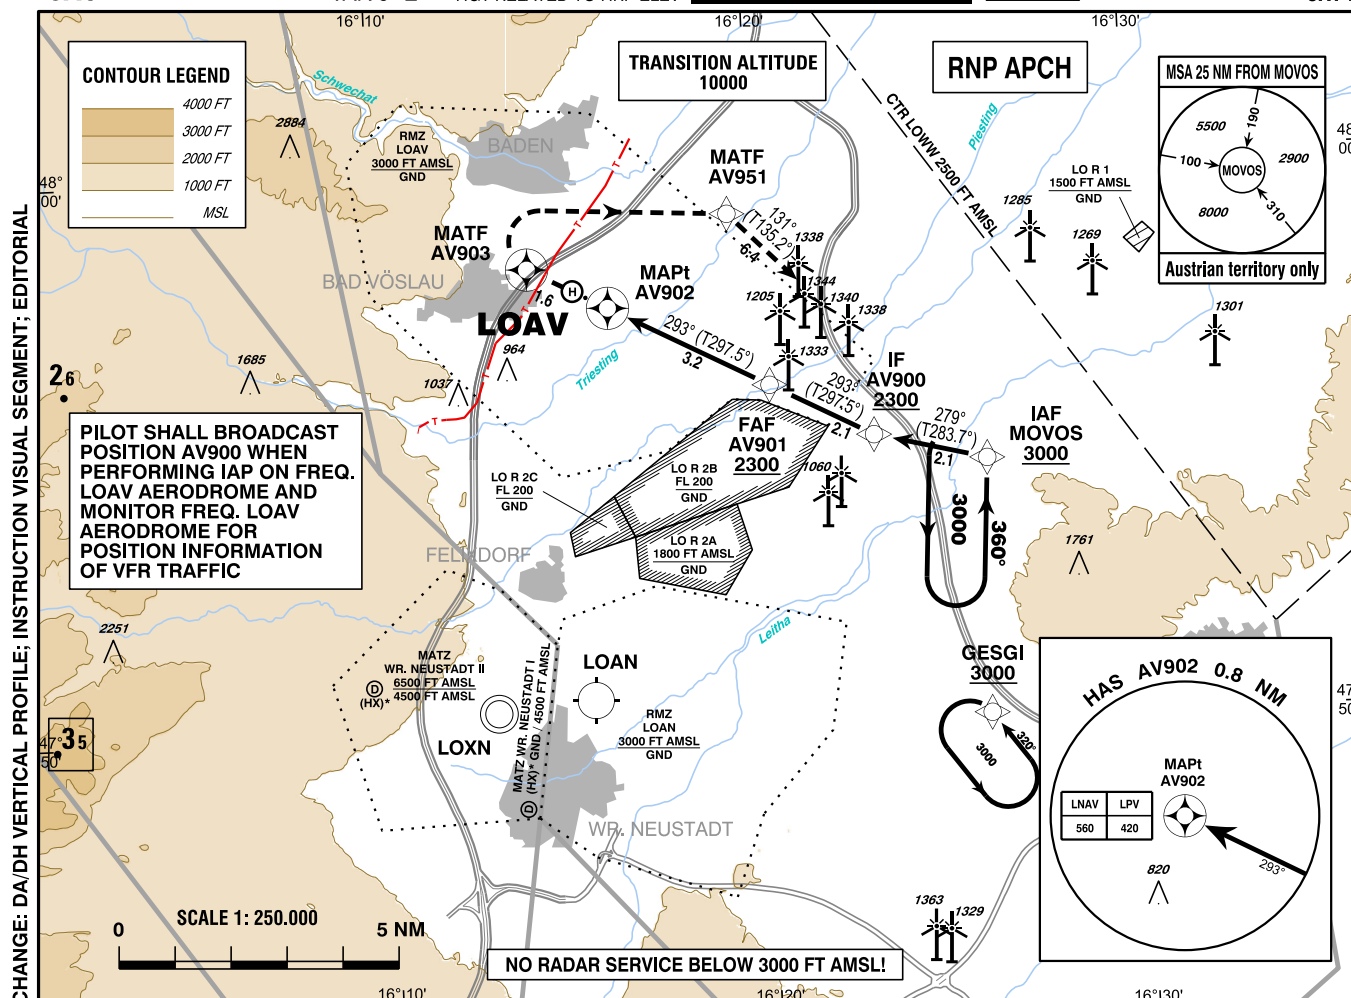

MAX IAS 80 KT IN FINAL APPROACH AND 90 KT DURING MISSED APPROACH TURN

Proceed VFR from DA (DH)



**BEARINGS AND TRACKS
ARE MAGNETIC**

**TRACKS IN BRACKETS
ARE TRUE**

**ALTITUDES, ELEVATIONS
AND HEIGHTS ARE IN FEET**

DISTANCES ARE IN NM

MISSED APPROACH: CLIMB STRAIGHT TO AV903, TURN RIGHT DIRECT TO AV951 AND FOLLOW THE PUBLISHED TRACK TO MOVOS; CLIMB TO 3000 FT AMSL AND HOLD.

DA (DH) IN FT	MA CLIMB GRADIENT	H		QNH LOWW required	AV901 to AV902 - DISTANCE 3.2 NM (Timing not authorized for defining the MAPT)						
LNAV	6.3 %	1440 (670)				GS (KT)	60	70	80	90	100
LPV		1300 (530)			AV901 - AV902	MIN : SEC	3:12	2:45	2:24	2:08	1:55
					Rate of descent (6.5%)	FT / MIN	390	460	520	590	660
DIST in NM to AV902		3	2	1							
ALTITUDE (HEIGHT)		2220 (1453)	1830 (1063)	1430 (663)							

Instrument Approach Procedure Coding Table Vöslau COPTER RNP 293

Path Terminator	Waypoint				Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Type	Flyover	Coordinates				Level	Speed		
TF	MOVOS	IAF	no	N47 54 40.60 E016 26 14.08				A3000+	K120-	RNP APCH	
TF	AV900	IF	no	N47 55 09.77 E016 23 15.31	279° (283.7°)	2.1		A2300+		RNP APCH	
TF	AV901	FAF	no	N47 56 06.95 E016 20 31.90	293° (297.5°)	2.1	right	A2300+	K080-	RNP APCH	
TF	AV902	MAPt	yes	N47 57 35.48 E016 16 18.35	293° (297.5°)	3.2				RNP APCH	
TF	AV903	MATF	yes	N47 58 19.67 E016 14 11.54	293° (297.4°)	1.6				RNP APCH	
DF	AV951	MATF	no	N47 59 11.80 E016 19 33.70			right		K090-	RNP APCH	
TF	MOVOS	MAHF	yes	N47 54 40.60 E016 26 14.08	131° (135.2°)	6.4	right	A3000+	K120-	RNP APCH	
RNAV Holding											
Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	MAX IAS	Minimum Holding Altitude FT MSL / FL	Time	DIST NM	Remarks			
GESGI	323.8°	320°	left	K140-	A3000	1 MIN					
MOVOS	003.6°	360°	left	K120-	A3000	1 MIN					

SBAS FAS Data Block Coding Table
Vöslau COPTER RNP 293

Input data

Operation Type	0
SBAS Provider	1
Airport Identifier	LOAV
Runway	29
Runway Direction	0
Approach Performance Designator	0
Route Indicator	
Reference Path Data Selector	0
Reference Path Identifier	E29A
LTP/FTP Latitude	475747.4095N
LTP/FTP Longitude	0161544.1195E
LTP/FTP Ellipsoidal Height (metres)	279.5
FPAP Latitude	475827.5880N
Delta FPAP Latitude (seconds)	40.1785
FPAP Longitude	0161348.7775E
Delta FPAP Longitude (seconds)	-115.3420
Threshold Crossing Height	32.1
TCH Units Selector	1
Glidepath Angle (degrees)	3.70
Course Width (metres)	105.00
Length Offset (metres)	0
HAL (metres)	40.0
VAL (metres)	50.0

Output data

Data Block	10 16 01 0F 0C 1D 00 00 01 39 32 05 23 64 95 14 EF 9F FA 06 EB 1E E5 39 01 E4 7A FC 82 82 72 01 64 00 C8 FA E9 17 4F 2D
Calculated CRC Value	E9174F2D

Required Additional Data


ICAO Code	LO
LTP/FTP Orthometric Height (metres)	234.0
FPAP Orthometric Height (metres)	234.0

INSTRUMENT APPROACH CHART

VAR 5° E

HRP ELEV 767 FT

Radar	134.675Mhz
Tower	118.600Mhz

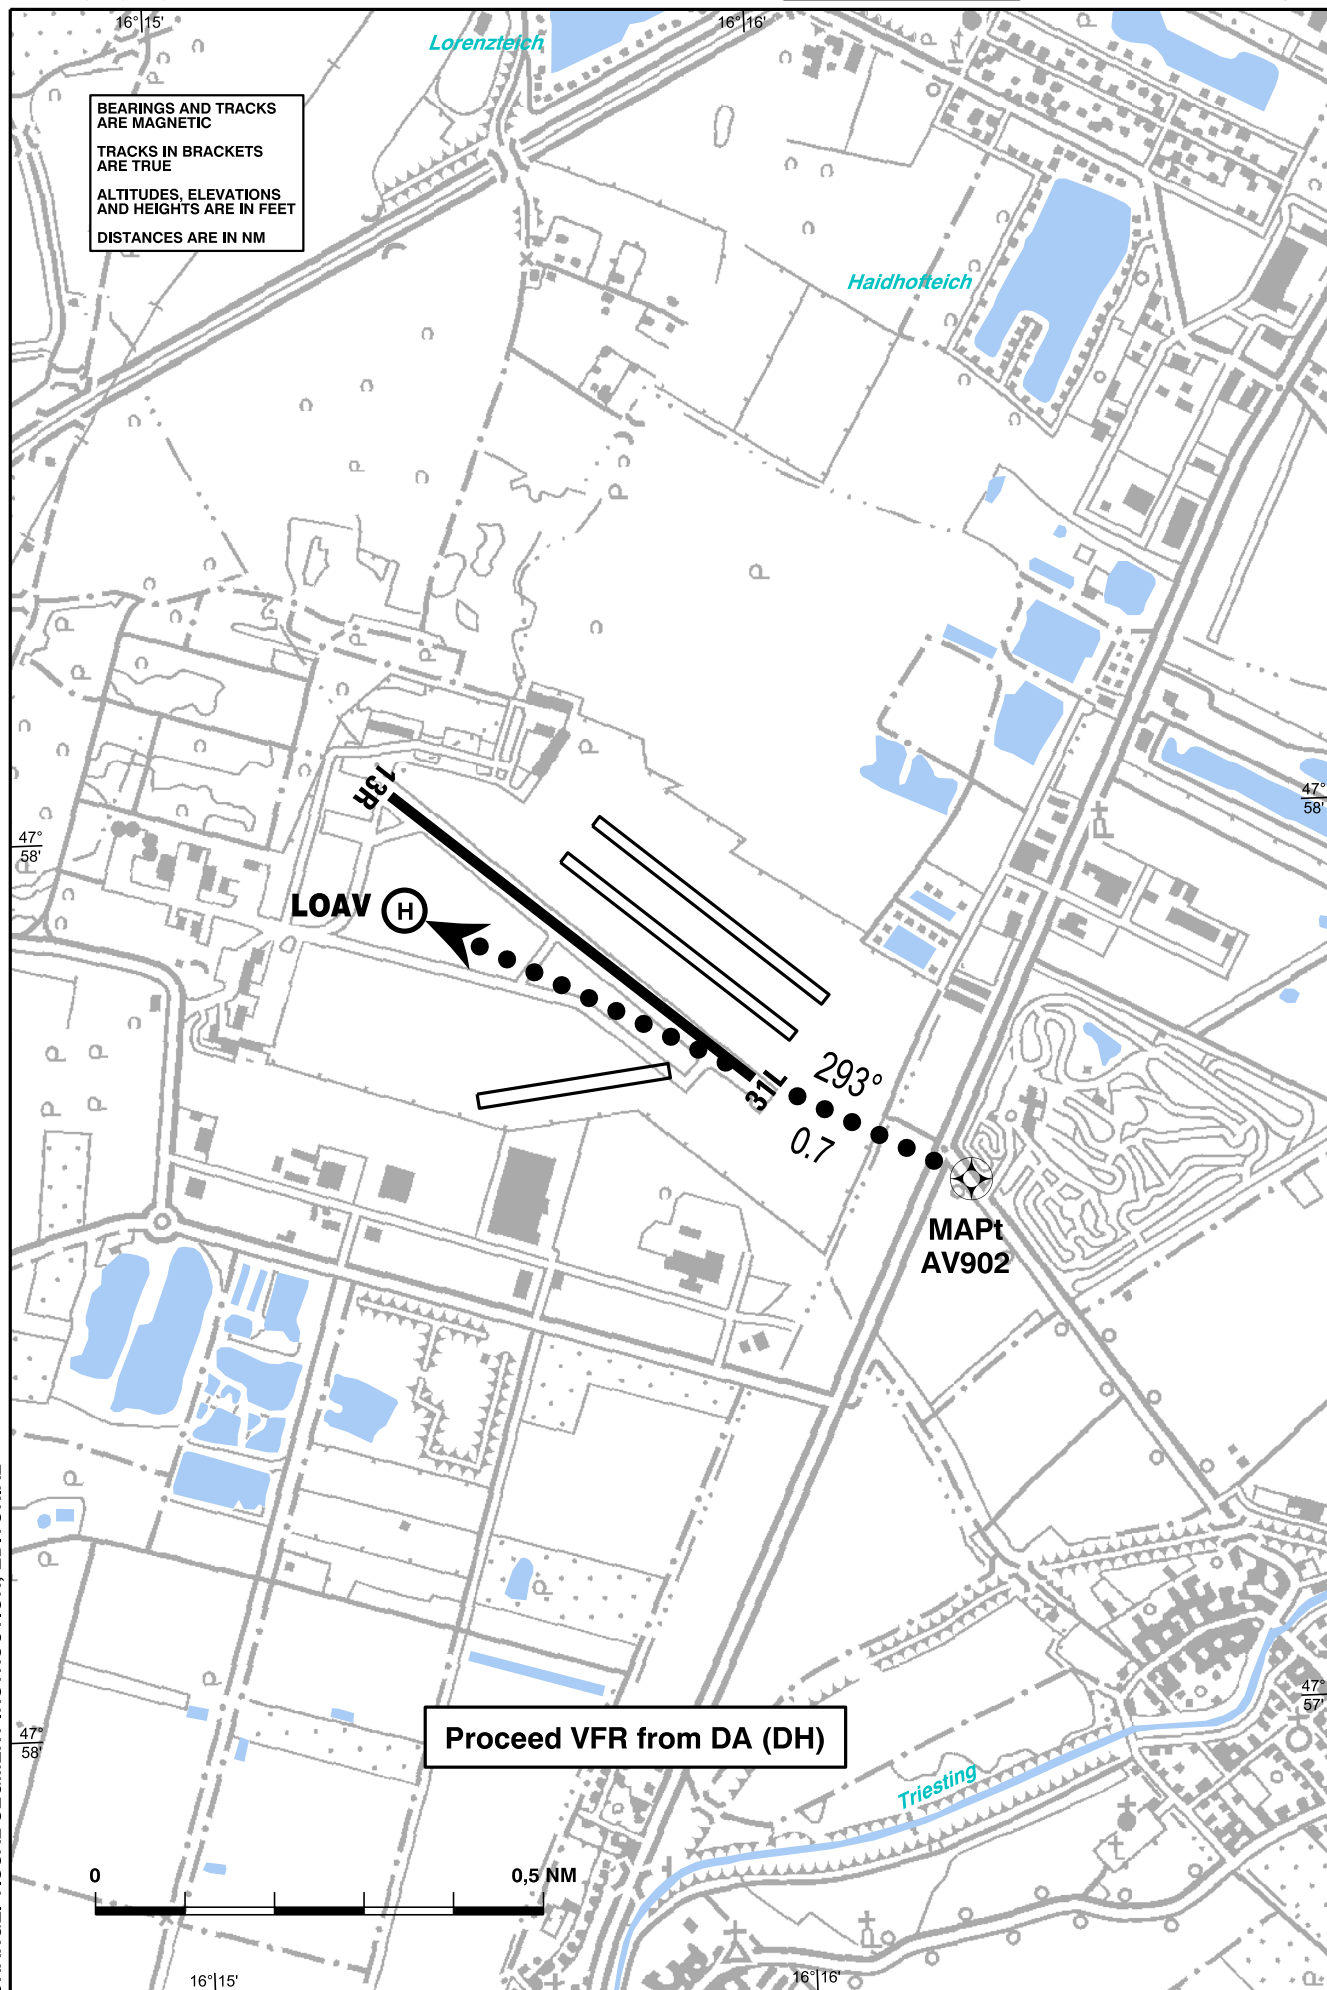

CHANGE: VISUAL SEGMENT INSTRUCTION; EDITORIAL