
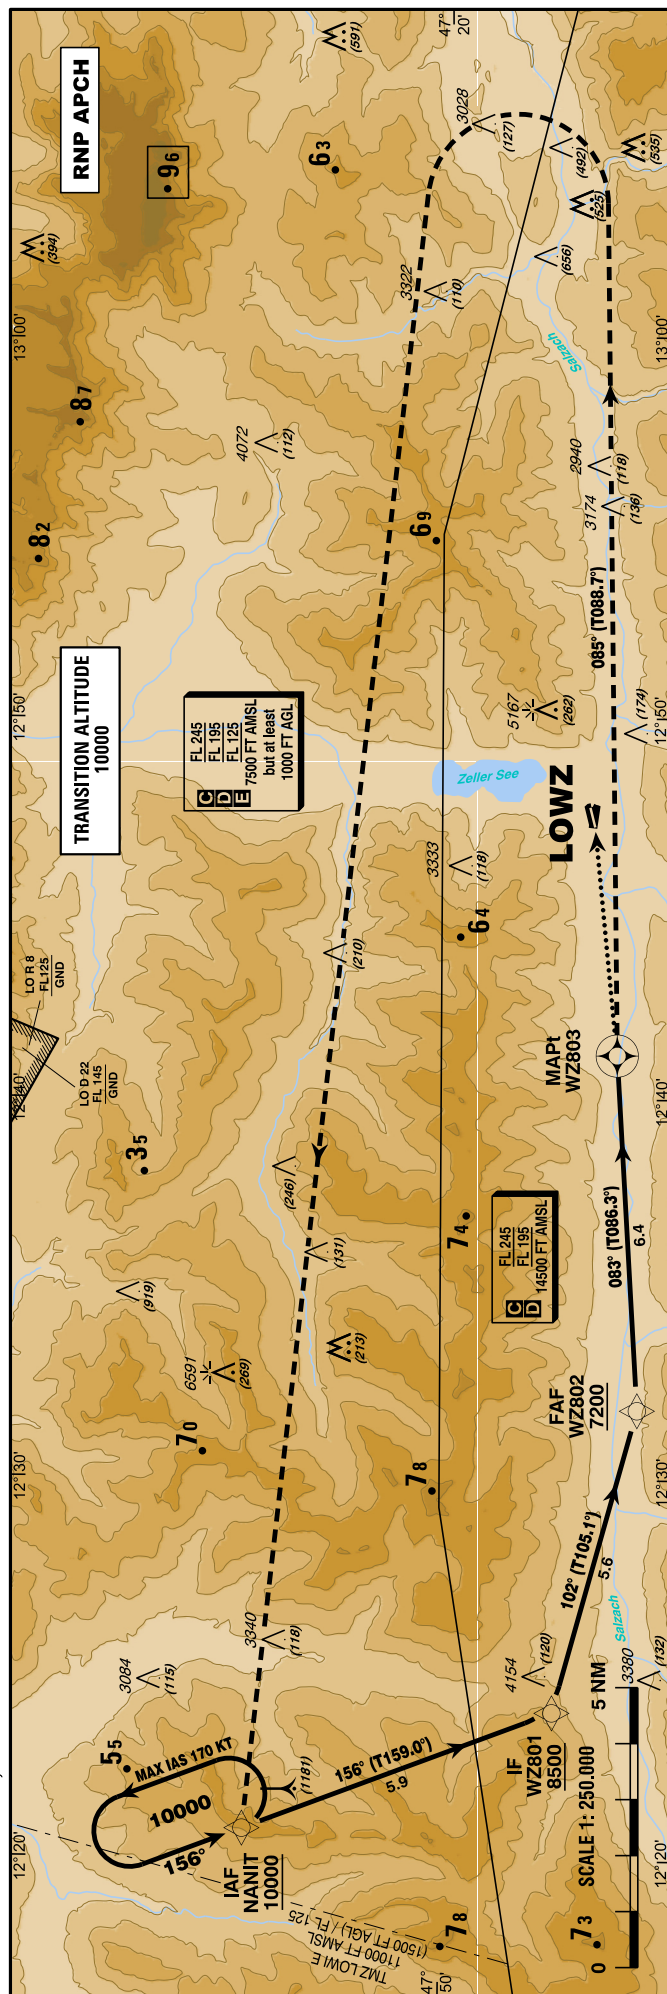



INSTRUMENT
APPROACH CHART - ICAO


VAR 3° E

AD ELEV 2470 FT
THR 08 ELEV 2471 FT
THR 26 ELEV 2471 FT
HGT RELATED TO AD ELEVRadar 128.975Mhz
Tower 119.700MhzZELL AM SEE
ÖSTERREICH AUSTRIA
RNP A
CAT A / B

CHANGE: OBSTACLES; EDITORIAL

BEARINGS AND TRACKS
ARE MAGNETIC
TRACKS IN BRACKETS
ARE TRUE
ALTITUDES, ELEVATIONS
AND HEIGHTS ARE IN FEET
DISTANCES ARE IN NMPIC shall be well familiar with RNP procedures
in general and is required to check the published
mandatory pre-flight briefing! For detailed information
see procedure related AIC.PIC shall be well familiar with the terrain
in the area of "Zell am See".

Visual approaches or visual circling NOT possible.

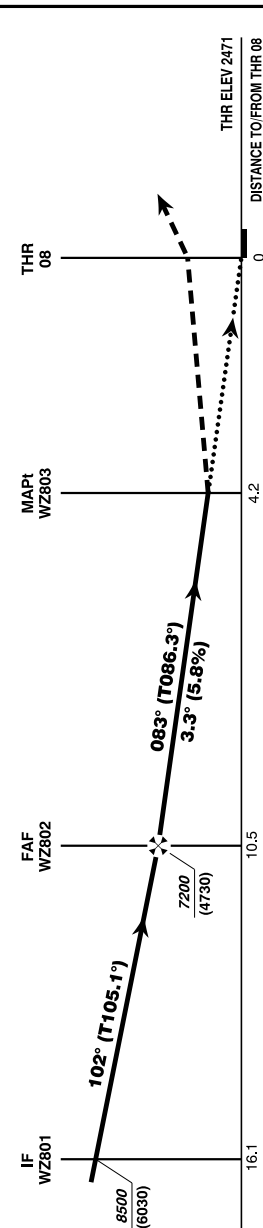Approach shall be executed under own navigation after the IAF
- NO RADAR SERVICE below 10.000 FT AMSLMISSED APPROACH: CLIMB ON TRACK 085°, WHEN PASSING 7500 FT AMSL TURN LEFT DIRECT TO NANIT;
CONTINUE CLIMB TO 10000 FT AMSL AND HOLD.

WZ802 to WZ803 - DISTANCE 6.4 NM (Timing not authorized for defining the MAPt)		QNH LOWI required	
MDA (MDH) IN FT	MA Climb Gradient	A	B
LNAV	2.5%	5630 (3160)	
	5.0%	5140 (2670)	
	7.0%	4970 (2500)	
VFR-PART: SEE CHART FOR VFR-FLIGHTS (LOWZ AD 2 MAP 14-2)			
Rate of descent (5.8%)		FT / MIN	700 820
WZ802 - WZ803		MIN : SEC	3:11 2:43
GS (KT)		80 100 120 140	
DIST In NM to WZ803		6 5 4 3 2	
ALT (HEIGHT)		7080 (4610) 6720 (4250) 6020 (3550) 5570 (3200)	

Instrument Approach Procedure Coding Table Zell am See RNP A

Path Terminator	Waypoint				Course/ Track ° MAG (° True)	DIST NM	Turn Direction	Constraints		Navigation Specification	Remarks
	Identifier	Type	Flyover	Coordinates				Level	Speed		
IF	NANIT	IAF	no	N472334.87 E0122047.17				A10000+		RNP APCH	
TF	WZ801	IF	no	N471804.22 E0122353.31	156° (159.0°)	5.9		A8500+		RNP APCH	
TF	WZ802	FAF	no	N471636.30 E0123150.53	102° (105.1°)	5.6	left	A7200+		RNP APCH	
TF	WZ803	MAPt	yes	N471700.84 E0124109.49	083° (086.3°)	6.4	left			RNP APCH	
CA					085° (088.7°)		right	A7500+		RNP APCH	
DF	NANIT	MAHF	yes	N472334.87 E0122047.17			left	A10000+		RNP APCH	
RNAV Holding											
Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	MAX IAS	Minimum Holding Altitude FT MSL / FL	Time	DIST NM	Remarks			
NANIT	159.0°	156°	left	K170-	10000 FT MSL	1 MIN					
THR Coordinates											
RWY 08	N471727.50 E0124715.00										
RWY 26	N471731.70 E0124739.60										

Courtesy of Austro Control GmbH

For Flight Simulation and non commercial use only !