

KASSEL-CALDEN
ILS or LOC
RWY 09


KASSEL ATIS 129.205
BREMEN RADAR 126.650

KASSEL TOWER 118.105
KASSEL GROUND 121.905

ELEV 861
OCH RELATED TO
THR 09 ELEV 861

VAR 2° E

INSTRUMENT
APPROACH
CHART - ICAO

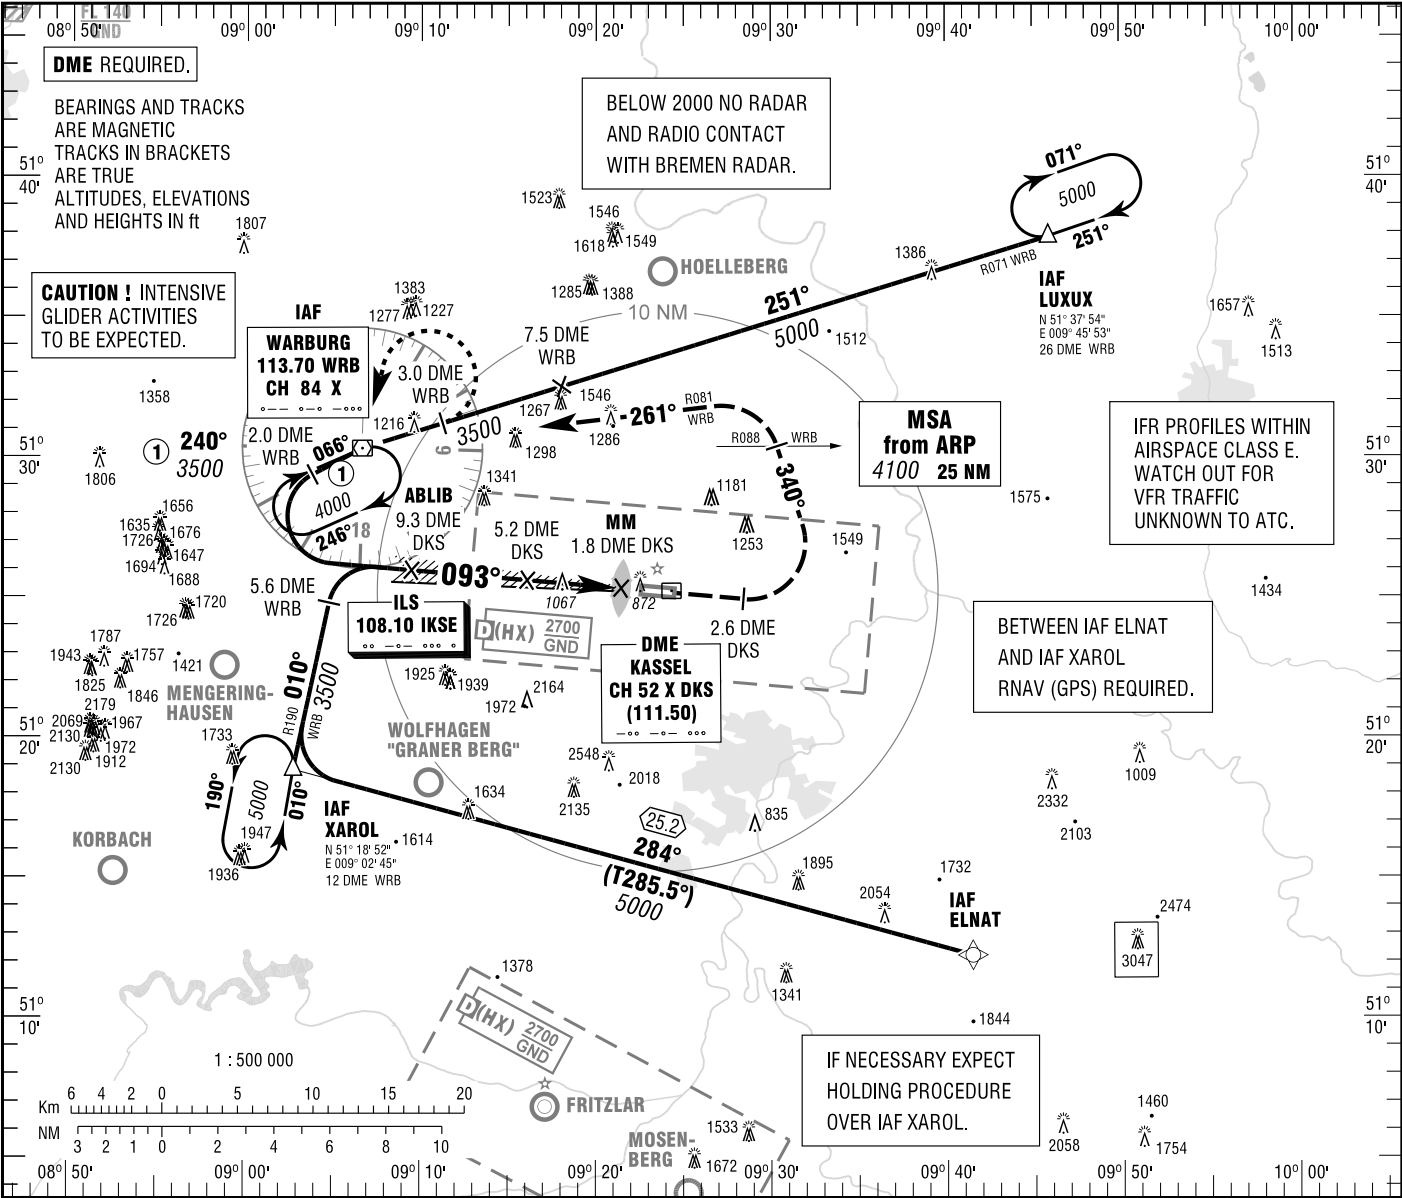

4000 ft

3000

2000

1000

0

from

WRB, LUXUX, XAROL, ELNAT

3500

9.3 DME DKS

5.2 DME DKS

1.8 DME DKS

GP 3.00° (5.2%)

093°

2180

861

ILS RDH 50

PROFILE SCALE 1 : 250 000

NM 14 13 12 11 10 9 8 7 6 5 4 3 2 1 0 1 2 3 4 5 6 NM

OCA (OCH)	A	B	C	D
ILS-DME CAT I	1004 (143)	1013 (152)	1023 (162)	1033 (172)
LOC-DME	1320 (460)	1320 (460)	1320 (460)	1320 (460)

DME DKS

DIST THR

ALTITUDE

9

8

7

6

5

4

3

3400	3080	2760	2440	2130	1810	1490
------	------	------	------	------	------	------

LOC-DME: Timing not authorized for defining the MAPt.

GS

5.2 DME DKS - THR (4.0 NM)

Rate of descent (5.2%)

kt

MIN:SEC

ft / MIN

80	100	120	140	160	180
3:00	2:24	2:00	1:43	1:30	1:20
420	530	640	740	850	960

MISSED APPROACH PROCEDURE

Climb straight ahead to 2.6 DME DKS;
LT, on track 340° until crossing R088 WRB,
LT, on R081 WRB to WRB climbing to 4000.