

PANS-OPS INSTRUMENT APPROACH CHART

AD ELEV 1203


ILS X or LOC RWY 25L INGOLSTADT/MANCHING (ETSI)

MUENCHEN RADAR 242.200		278.100		INGO RADAR 120.600 125.575		INGO TWR 373.200 125.250											
TACAN / LOCALIZER IGL CH51X / IIGW 108.1				APP COURSE 246°		GS INTCP ALT 3000		GS 3.0°/5.2%		DA see CAT		TDZE 1197		ALS-Length 900 M		LDA 9646	

NOTE:


- MISSED APCH TURN LIMITED TO 230 KIAS MAXIMUM.
- CIRCLING NOT AUTHORIZED NORTH OF RWY 07L/25R.
CIRCLING CAT B SPEED LIMITED TO 130 KIAS.
- DME REQUIRED

IAF
48°54.94'N
011°45.43'E

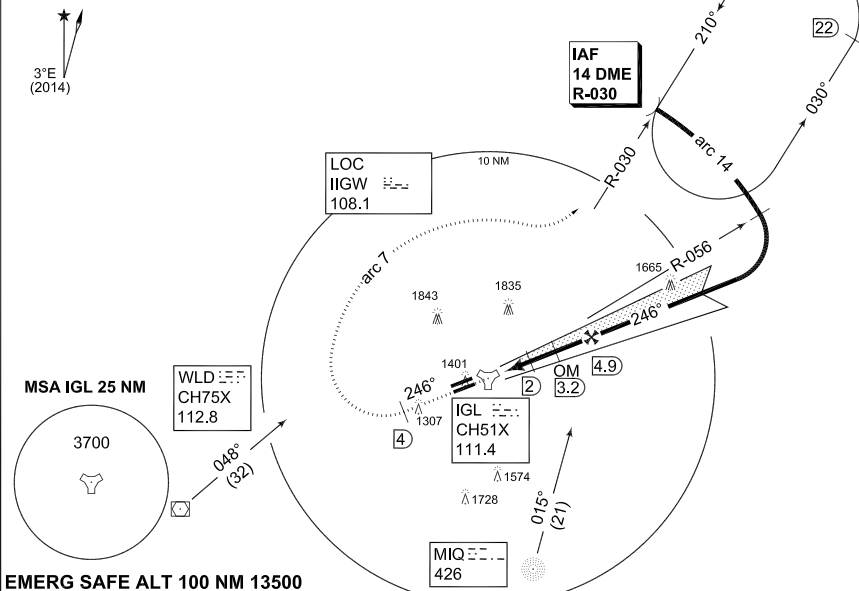

MISSED APPROACH

Climb on IGL track 246° to altitude 5000ft. At IGL R-246/4 DME turn right to intercept arc 7. Intercept IGL R-030 and proceed to IAF.

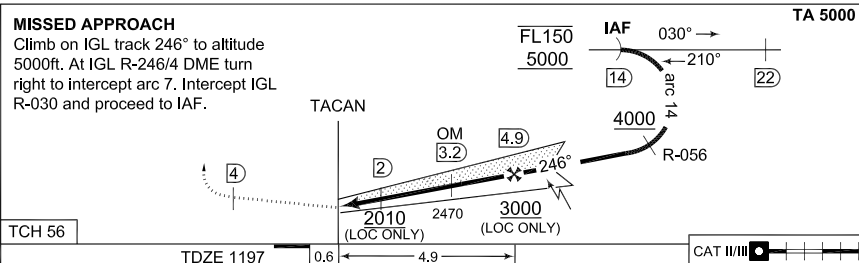

CATEGORY	A	B	C	D	E
ILS 25L	1397 - 0.8/550 200 (200-0.8/1.2)				1443 - 0.8/550 246 (300-0.8/1.6)
LOC 25L	1550 - 0.8 353 (400-0.8/1.6)		1550 - 0.8 353 (400-1.2/1.6)	1550 - 1.2 353 (400-1.2/2.0)	
CIRCLING	1700 - 1.6 497 (500-1.6)	1700 - 1.6 497 (500-1.6)	2480 - 4.8 1277 (1300-4.8)	2630 - 4.8 1427 (1500-4.8)	2630 - 4.8 1427 (1500-4.8)

ILS X or LOC RWY 25L

48°54.94'N
011°32.02'E

INGOLSTADT/MANCHING (ETSI)